

1390 nm laser diode - DFB


Model 2 : >20 mW / singlemode fiber / 14 pin Butterfly package

Reference: 1390LD-2-0-0-0/1


Technology : DFB*

| SPECIFICATIONS | Unit | Min | Typ | Maximum |
|----------------------------------|----------------------------|------|---------|---------|
| Output Power (CW mode) | mW | 20 | | |
| Output Power (Pulse mode) | mW | | 80 | |
| Center Wavelength (CW) | nm | 1385 | 1390 | 1395 |
| Spectral Width (FWHM) | nm | | <0.1 nm | |
| Threshold Current | mA | | 8 | 20 |
| Operating Current | mA | | 150 | 180 |
| Operation Voltage | V | | 1.6 | 1.8 |
| Wavelength shift w Temperature | nm/°C | | 0.08 | |
| Wavelength shift w Current | nm/mA | | 0.003 | |
| Side mode suppression ratio | dB | 35 | 50 | |
| Internal Photodiode Responsivity | mA/W | 5 | | |
| Internal Photodiode Dark Current | nA | | | 500 |
| TEC current (-5/60°C) | A | | | 1 |
| TEC Voltage (-5/60°C) | V | | | 1.5 |
| Internal thermistor (25°C) | kOhm | 9.5 | 10 | 10.5 |
| Fiber type | SMF28/PM1550 or equivalent | | | |
| Coating diameter | µm | | 900 | |
| Fiber bend radius | mm | 30 | | |
| Storage case temperature | °C | -40 | | 70 |
| Case operating temperature | °C | -20 | | 60 |
| Lead soldering temperature | °C | 255 | 260 | 265 |
| Laser diode reverse voltage | V | | | 15 |
| Pigtail termination | FC/APC connector | | | |
| Polarization state (PM version) | Aligned to the slow axis | | | |

Form factor & Laser diode pinning (standard 14-pin Butterfly Type-1) :

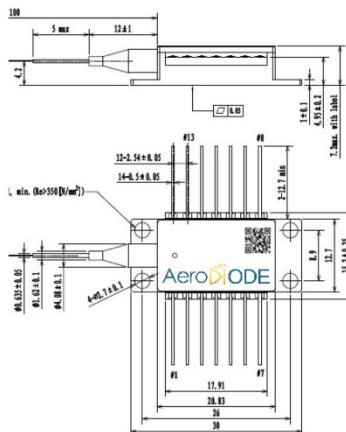

Dimensions are in mm



Totally floating pin-out

